## friendlyway luminum 32/40®

A Luminous and Interactive Advertising Pillar


The friendlyway luminum 32/40 frames your information with subtle color and light effects to attract viewer attention. Your services will be identifiable even from long distances.

The elegant designer display panel of the friendlyway luminum 32/40 is complemented by a distinctive background lighting pillar, which can assume any color scheme—for example, the colors of your corporate identity. The anodized aluminum housing of the friendlyway luminum 32/40 is attractively slim at just 4.7 cm and has chrome-plated side panels.

The terminal is fitted with a generously sized 32-inch or 40-inch display with an extra-wide viewing angle. As a standalone solution, the friendlyway luminum 32/40 is ideally suited for deployment at trade-shows.

The friendlyway luminum 32/40 is fitted with an integrated high-performance computer, and it can also be connected externally to any standard multimedia PC. The modular layout of the terminal is designed for maximum flexibility.



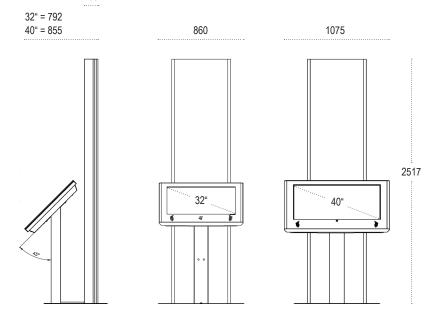

| Technical Data       | friendlyway luminum 32/40   |
|----------------------|---|
| Specifications       | 32" (resolution: 1360 x 768 pixels)   |
|                      | • 860 * 2516 * 792 mm (width * height * depth), 110 kg  |
|                      | • Luminance: 450 cd/qm  |
|                      | <b>40"</b> (resolution: 1920 x 1080 pixels)   |
|                      | • 1075 * 2516 * 855 mm (width * height * depth), 118 kg   |
|                      | • Luminance: 700 cd/qm  |
|                      | • View angle: 178° / 178°   |
|                      | <ul> <li>Touch option: SAW, Survace Acustic Wave</li> </ul>   |
|                      | • CPU: Intel <sup>®</sup> GM965, Core <sup>™</sup> Duo / Core <sup>™</sup> 2 Duo Support  |
|                      | (or comparable performance)   |
|                      | Housing: Anodized aluminum front panel, chrome-plated side     panels panels acated matel root panel.                             |
|                      | panels, powder-coated metal rear panel  • Power supply: Internal 85 - 265 VAC   |
|                      | • Ambient temperature: +5°C - +35°C   |
|                      | • Location: Indoor  |
| Highlights           | Unsurpassed design High-end construction Versatile Reliable component assortment Latest CPU technology                            |
| 0 115 1              | <b>-</b>  |
| Special Equipment    | Touch screen     Ultrasonic proximity sensor  |
|                      | Integrated hi-fi loudspeakers   |
|                      | Terminal color scheme in any RAL color  |
|                      | Wireless networking (WLAN)  |
|                      | Telephone options (analog and VoIP)   |
|                      | Foil label to personalize the kiosk with your corporate identity  |
|                      | Further configuration options on request  |
| Areas of Application | Interior signage / space management (door sign), waiting room s tion, cueing system, virtual registration and reception kiosk, tr |
|                      | fair, retail store, museum (exhibition)   |